



EFFICIENT EXCELLENT ENERGY++

HIGH EFFICIENCY
TOPCON
PV MODULE
Celestia

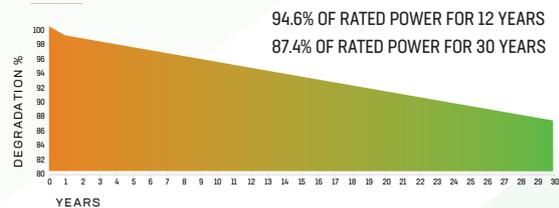

BIFACIAL PV MODULES
N -TYPE 144 HALF CUT
555-580Wp

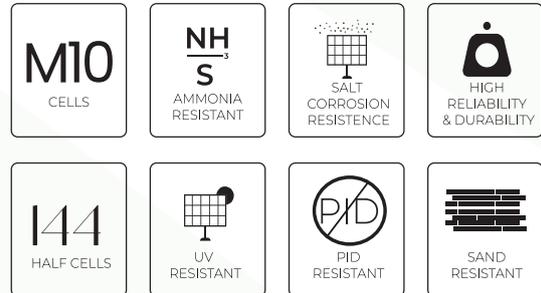

16BB HALF - CUT CELL TECHNOLOGY

New circuit design, lower internal current, lower resistive losses, energy yield is higher.

LOWER THE RISK OF HOT SPOT

Special circuit design with a much lower hot spot temperature.

EXCELLENT QUALITY & ENHANCED RELIABILITY

More than 14+ years' experience of manufacturing and intensive 40+ quality tests above the IEC standard ensures reliable modules.

SUPER STRONG FRAME

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal) with 18 microns anodization thickness.

EXCELLENT LOW LIGHT & ANTI - PID PERFORMANCE

Tested 3 times of IEC TS 62804.



SWELECT's solar modules meet global quality and safety standards, including IEC, UL, CAN and BIS.

Comprehensive Product & System Certificates*

- ✓ BIS Certified (IS 14286 & IS/IEC 61730 - 1&2)
- ✓ IEC 61215: Design qualification and type approval
- ✓ IEC 61730: Module safety qualification
- ✓ IEC TS 62804: Potential Induced Degradation (PID)
- ✓ IEC 61701: Salt Mist Corrosion Test
- ✓ IEC 62716: Ammonia Corrosion Test
- ✓ ISO 9001: Quality Management System
- ✓ ISO 14001: Environmental Management System
- ✓ ISO 45001: Occupational Health and Safety Management Systems
- ✓ ISO 50001: Energy Management System



Electrical Characteristics Bi-Facial Gain @ Different Albedo %





ELECTRICAL CHARACTERISTICS	RATE POWER (P _{max}) Wp	OPEN CIRCUIT VOLTAGE (V _{oc}) V	MAXIMUM POWER VOLTAGE (V _{mp}) V	SHORT CIRCUIT CURRENT (I _{sc}) A	MAXIMUM POWER CURRENT (I _{mp}) A	MODULE EFFICIENCY (η) %
SWT15BG6555	555	50.81	41.98	13.98	13.24	21.48
	10%	50.81	41.98	15.38	14.56	23.63
	25%	50.81	41.98	17.48	16.55	26.86
	40%	50.81	41.98	19.57	18.54	30.08
SWT15BG6560	560	50.94	42.12	14.04	13.31	21.68
	10%	50.94	42.12	15.44	14.64	23.85
	25%	50.94	42.12	17.55	16.64	27.10
	40%	50.94	42.12	19.66	18.63	30.35
SWT15BG6565	565	51.07	42.26	14.10	13.38	21.87
	10%	51.07	42.26	15.51	14.72	24.06
	25%	51.07	42.26	17.63	16.73	27.34
	40%	51.07	42.26	19.74	18.73	30.62
SWT15BG6570	570	51.20	42.40	14.16	13.45	22.07
	10%	51.20	42.40	15.58	14.80	24.27
	25%	51.20	42.40	17.70	16.81	27.58
	40%	51.20	42.40	19.82	18.83	30.89
SWT15BG6575	575	51.33	42.54	14.22	13.52	22.26
	10%	51.33	42.54	15.64	14.87	24.48
	25%	51.33	42.54	17.78	16.90	27.82
	40%	51.33	42.54	19.91	18.93	31.16
SWT15BG6580	580	51.46	42.68	14.28	13.59	22.45
	10%	51.46	42.68	15.71	14.95	24.70
	25%	51.46	42.68	17.85	16.99	28.07
	40%	51.46	42.68	19.99	19.03	31.43

TEMPERATURE RATINGS		MAXIMUM RATINGS	
NOCT	45°C ±2°C	System Voltage	1500 V _{dc}
Tc of V _{oc}	-0.216%/°C	Fuse Rating	30 A
Tc of I _{sc}	+0.041%/°C	Application / Safety	Class A; Protection Class II Fire - C; Type 4
TC of Power	-0.291%/°C	Snow Load	5400 Pa
Operating Range	-40°C to +85°C	Wind Load	2400 Pa
Power Binning	-0/+4.99W	Bifaciality Factor	80±5%

CONSTRUCTION	
Cell / Matrix	N-Type Topcon Cells; 144, 2 x (12 x 6)
Dimension	2278 x 1134 x 35 mm
Weight	33 kg
Glass	ARC; Low Iron; Semi Tempered; High Light Transmission; 2.0 mm
Encapsulation	High Volume Resistivity and Low MVTR
Substrate	Low Iron; Semi Tempered; High Light Transmission; 2.0mm
Frame	18µ Anodized Aluminium Alloy; Twin Wall Profile
Diode	Schottky Bypass Diodes
Locking	Corner Key Type
Junction Box	IP68; Junction Box
Cable	4 mm ² ; (+ ve) 300mm, (- ve) 250mm Cable Length (Customized cable length available on request)
Connector	MC4 Compatible

PACKING CONFIGURATION		
Container	20 feet (HC)	40 feet (HC)
Pieces per Pallet	31	31
Pallets per Container	8	20
Pieces per Container	248	620

Note: Design & Specifications are subjected to change without notice. Electrical Parameters measured at STC only (at 25°C, 1000 W / m²). Test uncertainty for Pmp ±3%. Please refer to installation manual and strictly adhere to instruction / guidelines to qualify for warranty terms.

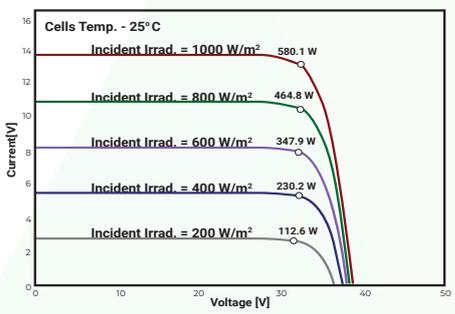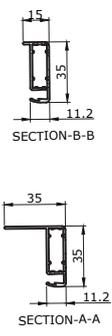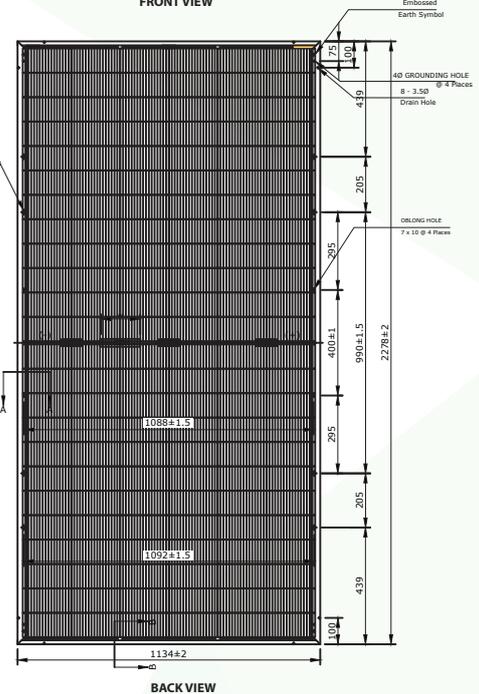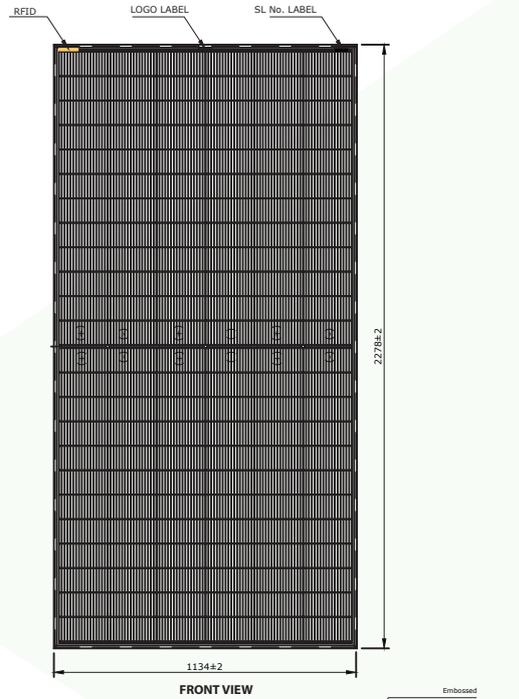

I-V Curve of 580W at 25°C cell temp. and different Irradiance level

Celebrating **40** years **12** YEARS WARRANTY FOR MATERIALS & PROCESSING **30** YEARS WARRANTY FOR LINEAR POWER OUTPUT

swelectes.com

SWELECT ENERGY SYSTEMS LIMITED
SWELECT HOUSE
 No 5, Sir P. S. Sivasamy Salai, Mylapore, Chennai- 600 004.
 Tamil nadu, India. info@swelectes.com | +9144 24993266

PV MODULE MANUFACTURING PLANT
SWELECT HHV SOLAR PHOTOVOLTAICS PRIVATE LIMITED
 No.169,166, Sembagoundan Pudur, Kuppeplayam Village,
 Coimbatore North Taluk, Coimbatore District, Tamil Nadu - 641 107.

SCAN QR CODE FOR PRODUCT CATALOGS